

INDUSTRIAL® VERSAFLEX® HE SERIES HIGH EFFICIENCY MELTBLOWN CARTRIDGES



Versaflex High Efficiency Meltblown Cartridges assure maximum process compatibility due to their thermally-bonded, glue-free design. Their graded density matrix traps and holds dirt within, providing longer life and better flow rates than standard cartridges.

These filter cartridges are 100% polypropylene and manufactured with FDA-listed materials using a thermal-bonding process that seals the meltblown media to the endcaps to assure a bypass-free cartridge.

Versaflex High Efficiency Meltblown Cartridges have been performance tested to assure you of a quality product. They deliver high dirt-loading capabilities, with superior performance over spun-bonded and stringwound cartridges.

FEATURES/BENEFITS

- Absolute rated 99% efficiency at stated micron size
- Chemically compatible in most applications
- High dirt-loading capacity
- Longer life than spun-bonded and stringwound cartridges
- Low pressure drop
- 100% polypropylene cartridge
- Rigid, polypropylene center core
- Variety of O-rings available

- No surfactants, binders or adhesives used in production
- Manufactured with FDA-listed materials
- Several lengths and endcap configurations
- Seven micron ratings
- Micron rating stamped onto cartridge for easy identification
- Safe, easy incineration and disposal

APPLICATIONS

- Finish machining
- Food and beverage
- Oils
- Parts washers
- Pre-filter for RO systems

- Seal protection
- Solvents
- Spray nozzle protection

Custom configurations available. Please contact customer service.



CARTRIDGE SPECIFICATIONS

Filter Media	Polypropylene
Max. Temp. Rating	160°F (71.1°C)
Max. Differential Pressure	30 PSIG (2.1 bar) dirty
Recommended Change Out	10-15 PSIG (0.7-1.0 bar)

CASE QUANTITY

10": 30 per case
 20-40": 15 per case
 All with endcaps: 15 per case

PRESSURE DROP VS FLOW RATE

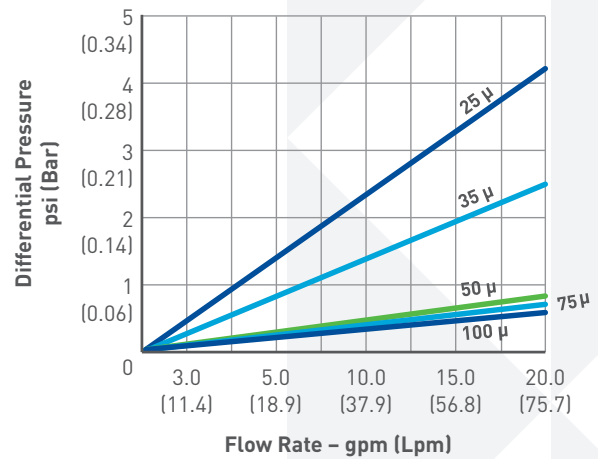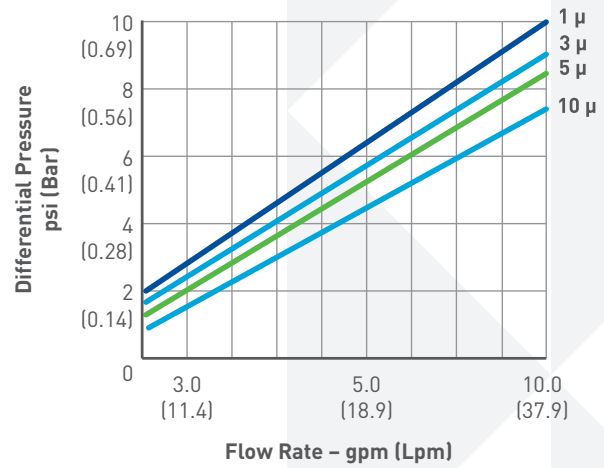

ORDERING INFORMATION


To create your ordering part number, use the part number configurator below.
 Custom configurations available. Please contact customer service.

EXAMPLE: VFHE50-20BHPXXDP

Versaflex® Filter Cartridge (VFHE)

50-absolute micron rating (50), 20" length (20), 2.5" diameter (B), High efficiency cartridge (H)

Polypropylene core (P), No endaps (X), No outer sleeve (X), Double-open-ended (D), Polypropylene seal (P)

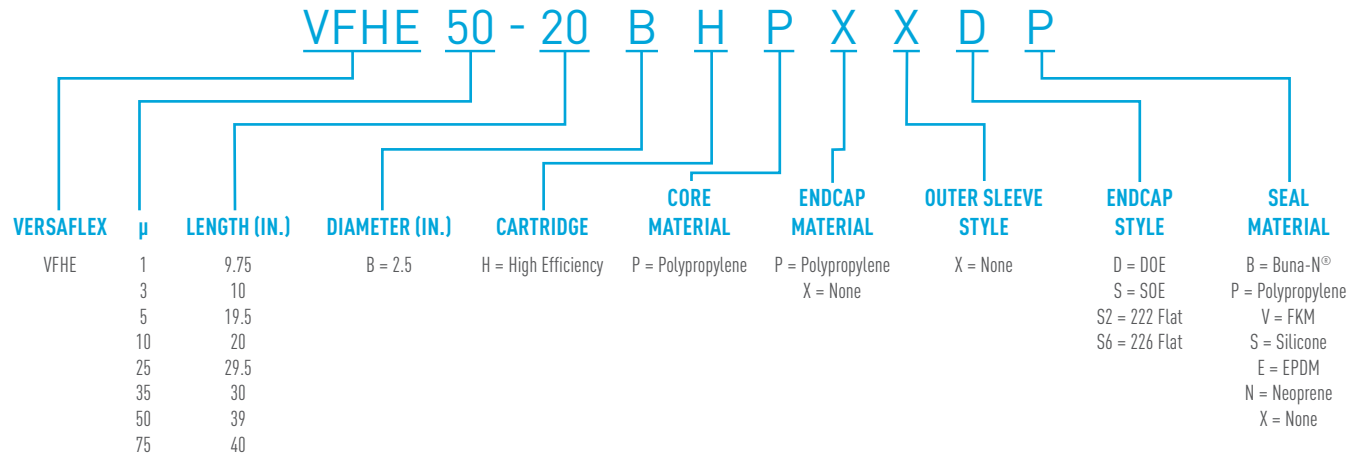

FILTRATION & PROCESS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209

P: 262.238.4400 | F: 262.518.4404 | WWW.PENTAIRINDUSTRIAL.COM | CUSTOMER CARE: 800.279.9404

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

4003011 Rev A NV13 © 2013 Pentair Residential Filtration, LLC. All Rights Reserved.