

## INDUSTRIAL® VERSAFLEX® SERIES MELTBLOWN POLYPROPYLENE CARTRIDGES



Versaflex Meltblown Polypropylene Filter Cartridges are 100% polypropylene and manufactured with FDA-listed materials using a thermal-bonding process that seals the meltblown media to the endcaps to assure a bypass-free cartridge. These cartridges have been performance tested to assure you of a quality product. They deliver high dirt-loading capabilities, with superior performance over spun-bonded and stringwound cartridges.

Versaflex Meltblown Polypropylene Filter Cartridges assure maximum process compatibility due to their thermally-bonded, glue-free design. Their graded density matrix traps and holds dirt within, providing longer life and better flow rates than standard cartridges.

### FEATURES/BENEFITS

Nominal efficiency rating  
Chemically compatible in most applications  
High dirt-loading capacity  
Longer life than spun-bonded and stringwound cartridges  
Low pressure drop  
100% polypropylene  
No surfactants, binders or adhesives used in production

Manufactured with FDA-listed materials  
Several lengths and encap configurations  
Endcaps thermally bonded to cartridges  
Micron ratings stamped on cartridge for easy identification  
Variety of O-rings available  
Safe, easy incineration and disposal

### APPLICATIONS

Finish machining  
Food and beverage  
Oils  
Parts washers  
Pre-filter for RO systems  
Seal protection  
Solvents  
Spray nozzle protection

## CARTRIDGE SPECIFICATIONS

---

Filter Media	Polypropylene
Max. Temp. Rating	160°F (71.1°C)
Max. Differential Pressure	30 PSIG (2.1 bar) dirty
Recommended Change Out	10-15 PSIG (0.7-1.0 bar)


## CASE QUANTITY

---

10": 30 per case  
20-40": 15 per case  
All with endcaps: 15 per case

## PRESSURE DROP VS FLOW RATE

---

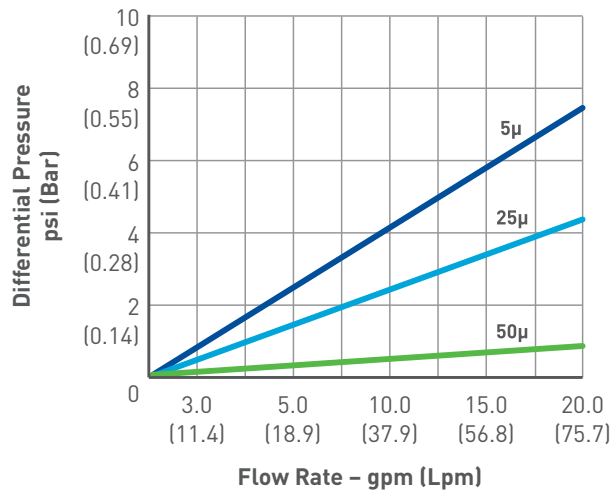


## ORDERING INFORMATION

To create your ordering part number, use the part number configurator below.  
 Custom configurations available. Please contact customer service.

### EXAMPLE: VF100-30BMXXXDX

Versaflex® Filter Cartridge (VF)  
 100-micron rating (100), 30" length (30), 2.5" diameter (B), Meltblown cartridge (M)  
 No core (X), No endcaps (X), No outer sleeve (X), Double-open-ended (D), No seal (X)

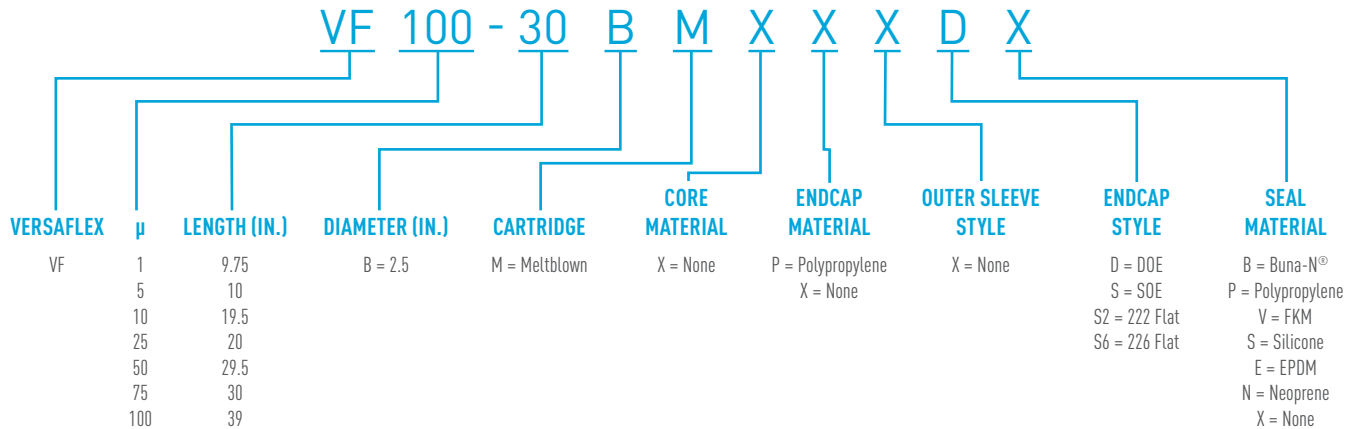

### FILTRATION & PROCESS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209  
 P: 262.238.4400 | F: 262.518.4404 | WWW.PENTAIRINDUSTRIAL.COM | CUSTOMER CARE: 800.279.9404

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

4003012 Rev A NV13 © 2013 Pentair Residential Filtration, LLC. All Rights Reserved.