

INDUSTRIAL[®] LIQUID FILTER BAGS



Pentair[®] Industrial Liquid Filter Bags offer economical filtration for a wide array of applications. Highly controlled manufacturing procedures ensure consistent quality and no contamination. The unique bag designs provide added strength and avoid risk of bypass. Our filter bags fit all industry-standard bag housings.

FEATURES/BENEFITS

Available medias range from 1-1500 μ

Wide array of silicone-free media fibers to meet needed temperature and micron specifications

Multi-layered filtering capabilities for higher dirt-holding capacities and fewer change-outs

Bag finish or covers available for strict migration requirements

Heavy-duty handle for easy installation and removal

OEM replacement ring styles

Customized and specialty bags available


BAG SPECIFICATIONS

PENTAIR HOUSING MODEL	BAG SIZE	LENGTH		DIAMETER		SURFACE AREA	
		IN	MM	IN	MM	FT ²	M ²
44-6	#3	8	203	4.12	105	.5	0.05
44-12	#4	14	356	4.12	105	1.0	0.09
66-12	#7	15	381	5.62	143	1.3	0.12
66-18	#8	21	533	5.62	143	2.0	0.19
66-30	#9	32	813	5.62	143	3.4	0.31
88-15	#1	16.5	419	7.06	179	2.0	0.19
88-15	#1 inner	14.5	368	5.75	146	1.6	0.15
88-30	#2	32	813	7.06	179	4.4	0.41
88-30	#2 inner	30	762	5.75	146	3.6	0.33
M88-30(OEM)	#12	30	762	8.25	203	5.5	0.51
Multi-Rounds	#2	32	813	7.06	179	4.4	0.41

PRESSURE DROP VS FLOW RATE

The following data is based on 1ft² (0.09 m²) of filtration media.

Divide the differential pressure by the number of media square footage found in the selected bag to get your final rating.

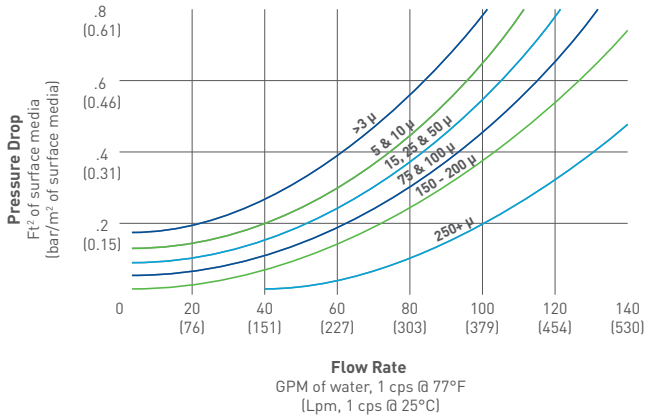

CORRECTION CHART

The following chart is based on 1 centipoise. (CPS)

If your liquid is greater than 1 CPS:

1. Select your liquid's viscosity
2. Determine your correction factor

EX: If your liquid's viscosity is 100,
your correction factor is 8.3

3. Multiply the Bag Selection Guide (left) by your correction factor

VISCOSITY (CPS)	CORRECTION FACTOR
50	4.5
100	8.3
200	16.6
400	27.7
800	50.0
1000	56.2
2000	113.6
4000	161.0
6000	250.0
8000	325.0

MICRON (µ) RATINGS AVAILABLE

FIBER	MICRON RATING																TEMP				
	1	5	10	15	25	50	75	100	125	150	175	200	250	300	400	600		800	1000	1500	
Felt, nomex		•	•		•	•		•													450°F (232.2°C)
Felt, polyester	•	•	•	•	•	•	•	•				•									250°F (121.1°C)
Felt, polypropylene	•	•	•		•	•		•													200°F (93.3°C)
Monofilament mesh, nylon		•			•	•	•	•	•	•	•	•	•	•	•	•	•	•			250°F (121.1°C)
Monofilament, polyester		•	•		•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	250°F (121.1°C)
Monofilament mesh, polypropylene													•	•	•	•	•				200°F (93.3°C)
Multifilament mesh, polyester								•	•	•		•	•	•	•		•				250°F (121.1°C)
Oil removal					•																200°F (93.3°C)

ORDERING INFORMATION

To create your ordering part number, use the code abbreviation tables below in conjunction with the part number configurator (next page). *Custom configurations available. Please contact customer service.*

MEDIA		
CODE	DESCRIPTION	AVAILABLE μ
KE	Felt, polyester	1, 5, 10, 15, 25, 50, 75, 100, 200
KO	Felt, polypropylene	1, 5, 10, 25, 50, 100, 200
NMO	Monofilament mesh - nylon	5, 25, 50, 75, 100, 125, 150, 175, 200, 250, 300, 400, 600, 800
KEM	Multifilament mesh - polyester	100, 125, 150, 200, 250, 300, 400, 800
KES	Felt, polyester, S (fully stitched bag)	1, 5, 10, 15, 25, 50, 75, 100, 200
KEW	Felt, polyester, W (fully welded bag)	1, 5, 10, 15, 25, 50, 75, 100, 200
KOS	Felt, polypropylene, S (fully stitched bag)	1, 5, 10, 25, 50, 100, 200
OR	Oil removal material	25
HT	Felt, nomex (nylon)	5, 10, 25, 50, 100
KOMO	Monofilament mesh, polypropylene	CALL FACTORY
KOW	Felt, polypropylene, W (fully welded bag)	1, 5, 10, 25, 50, 100, 200

FINISH/COVER (FELT ONLY)	
CODE	DESCRIPTION
K	Glazed
NG	Unglazed
KEM	Polyester multifilament mesh cover
C	Spunbonded nylon (cerex)
R	Spunbonded polyester (reemay)
NMO	Nylon monofilament mesh cover
KOMO	Polypropylene monofilament mesh cover
HE	High efficiency (available KE & KO only)

SIZE		
CODE	DESCRIPTION	(DIA. x LENGTH)
1	Standard #1	7 1/16" x 16 1/2"
2	Standard #2	7 1/16" x 32"
3	Standard #3	4 1/8" x 8"
4	Standard #4	4 1/8" x 14"
7	Standard #7	5 5/8" x 15"
8	Standard #8	5 5/8" x 21"
9	Standard #9	5 5/8" x 32"
12	Standard #12	8.25" x 32"
RK1	Ronningen Petter fabric basket #1	8.25" x 30"
RK2	Ronningen Petter fabric basket #2	8.25" x 40"
C01	Commercial filters #1	7 5/16" x 17"
C02	Commercial filters #2	7 5/16" x 33"


RING	
CODE	DESCRIPTION
S	Carbon steel
SS	Stainless steel
KE	FSI style flanged polyester ring
K	FSI style flanged plastic top (not available for #7, #8, #9, and #12 bags)
DS	Draw string
KO	Polypropylene (not available for #7, #8, #9, and #12 bags)
NR	No ring

OPTIONS	
CODE	DESCRIPTION
A	Automotive - bottom and side seams turned to the inside prior to attaching support ring.
DH	Double handle
NH	No handle
RC	Reverse collar
RT	Raw top

PART NUMBER CONFIGURATOR

SINGLE BAG EXAMPLE: KE10K2S


Felt, polyester bag (KE)
10-micron rating (10), Glazed finish (K),
Standard #2 size (2), Carbon steel ring (S)

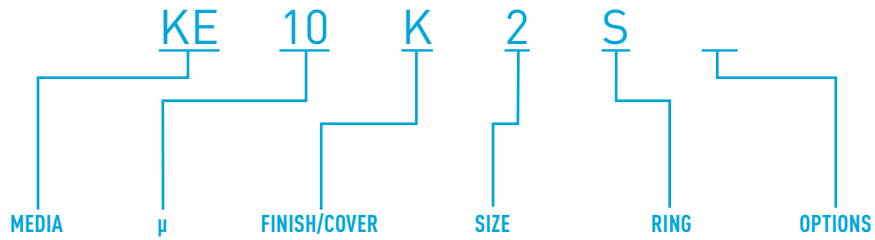

Note: case quantity 25

DOUBLE BAG EXAMPLE: KE50/KE25K2SDH

Inner Bag: Felt, polyester bag (KE), 50-micron rating (50)
Outer Bag: Felt, polyester bag (KE), 25-micron rating (25), Glazed finish (K),
Standard #2 size (2), Carbon steel ring (S), Double handle (DH)

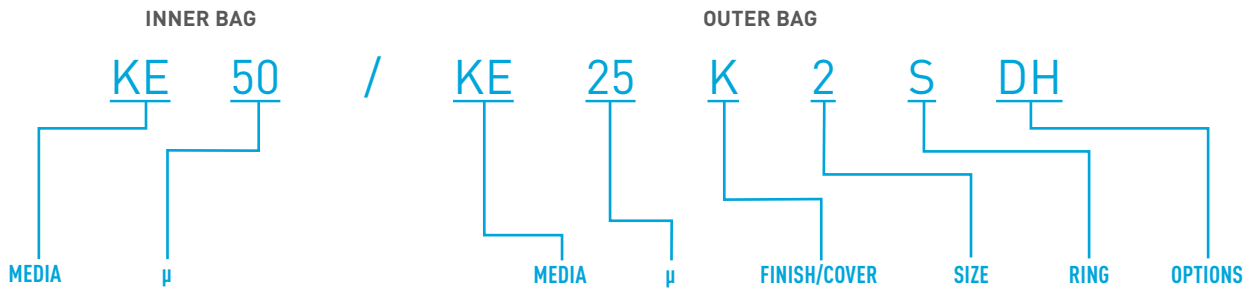

Note: case quantity 25



FILTRATION & PROCESS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209
P: 262.238.4400 | F: 262.518.4404 | WWW.PENTAIRINDUSTRIAL.COM | CUSTOMER CARE: 800.279.9404

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

4003014 Rev A NV13 © 2013 Pentair Residential Filtration, LLC. All Rights Reserved.